


Oil Free Scroll Air Compressors


ANEST IWATA Corporation is the first in the world to develop Air-Cooled, Oil-Free Scroll Compressors, since 1991.

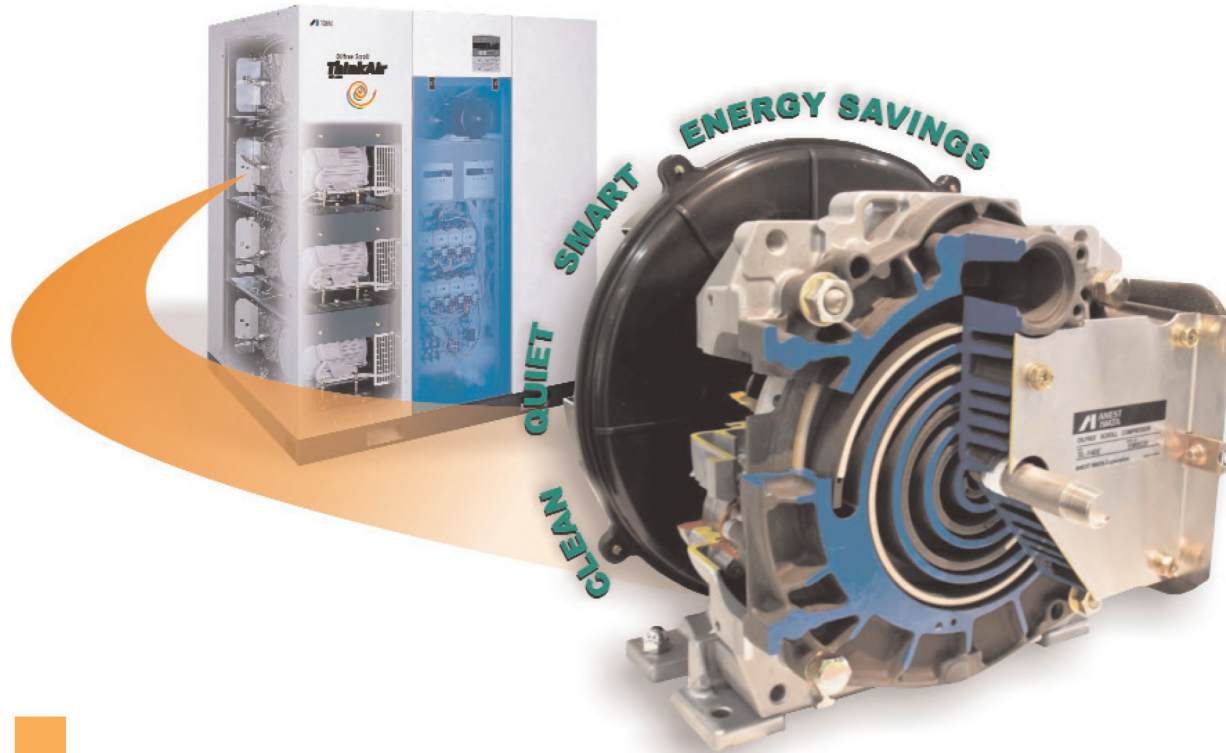

QUALITY PRODUCTS

The ANEST IWATA scroll compressor is extremely quiet (53-60 dB) and safe. The SL Compressors operate according to air consumption and also selects the optimum number of scroll style air-ends to run.

- Quiet (53-60dB)
- Clean-100% Oil-Free air
- Energy Savings
- Multi-stage control system
- Safe
- Smart, compact design

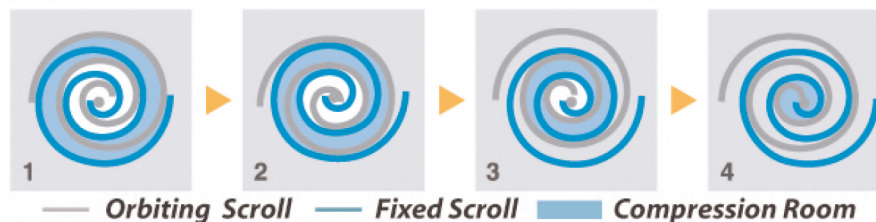

As the orbiting scroll rotates from No.1 position to the No. 4 position the crescent shaped compression room at a semetrical point is gradually reduced, compressed and exhausted through the outlet at the center of the air end.

Oil Free Scroll Air Compressors

TECHNICAL SPECIFICATIONS AND DESCRIPTIONS

SPECIFICATIONS


Model	Motor Rating (HP)	Control System	Control Pressure(PSI)	Free Air Delivery (CFM)	Air Outlet (BSPT)	Outer Dims (Inches)	Weight (lbs)	Noise (dB)
SLP75BS4-236	10	auto start / stop	94-116	30	1/4	26 X 38 X 47	617	53
SLP110ES4-236	15	auto start / stop	94-116	44	3/8	26 X 38 X 47	794	56
SLP150BS4-236	20	auto start / stop	94-116	59	3/4	26 X 38 X 62	1025	58
SLP220BS4-236	30	auto start / stop	87-101	95	1	55 X 45 X 65	1940	59
SLP300BS4-236	40	auto start / stop	87-101	127	1 1/2	55 X 45 X 65	2315	60

SCROLL BASE MOUNT AIR COMPRESSORS

Model SLB

Model	Horse Power (HP)	Phase	Voltage (V)	PRESURE ON-OFF (PSI)	SCFM at 115 PSI (CFM)	Noise (dB)	TANK (GAL)
SLB-2	2	3	208/230/460	85-115	5.3	-	-
SLB-3	3	3	208/230/460	85-115	8.3	-	-
SLB-5	5	3	208/230/460	85-115	14.5	-	-


* 2HP 1PH 115/208-230V model is available as an optional model.



SCROLL TANK MOUNT AIR COMPRESSORS

Model SLT


Model	Horse Power (HP)	Phase	Voltage (V)	PRESURE ON-OFF (PSI)	SCFM at 115 PSI (CFM)	Noise (dB)	TANK (GAL)
SLT-2	2	3	208/230/460	85-115	5.3	54	60/80
SLT-3	3	3	208/230/460	85-115	8.3	61	60/80
SLT-5	5	3	208/230/460	85-115	14.5	67	60/80

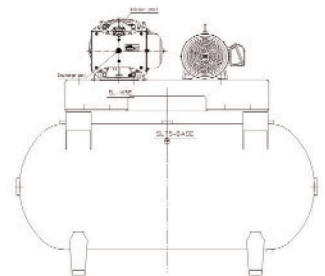

SCROLL TANK MOUNT ENCLOSURE AIR COMPRESSORS

Model SLTE

Model	Horse Power (HP)	Phase	Voltage (V)	PRESURE ON-OFF (PSI)	SCFM at 115 PSI (CFM)	Noise (dB)	TANK (GAL)
SLTE-2	2	3	208/230/460	85-115	5.3	51	60/80
SLTE-3	3	3	208/230/460	85-115	8.3	57	60/80

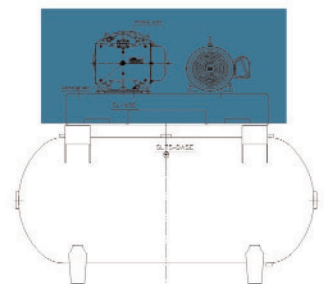

ANEST IWATA Air Engineering, Inc.

5325 Muhlhauser Rd
 West Chester, OH 45011
 Tel: 513-755-3100 Fax: 513-755-0888
 Toll Free: 800-440-0282
 www.anestiwata.com

DISTRIBUTED BY: